



IRFU

Premium Line Internal Vibrator



Quite simply extremely flexible: The IRFU series

The high-frequency internal vibrators of the IRFU series are characterized above all by one feature: They simply connect to the 1-phase power supply and are ready for operation. Quick, simple, flexible. Ideal for independent operation.

- Integrated frequency converter
- Reliable operation, even if the input voltages fluctuate and when used with generators
- Sealed electronics
- Made in Germany
- Available in different hose lengths

IRFU in detail:



Bodyguard


Safety First - the Bodyguard™ protection system offers additional safety to the operator. The Bodyguard™, which is attached at the end of a cable, controls all subsequent elements and switches the unit off within 3 milliseconds in the event of irregularities or danger of electric shock.

- The Bodyguard is adaptable, i.e. when exchanging the cable, the Bodyguard can be connected to the new cable and thus can continue to be used.
- Check functionality independently by using operating lights and test push buttons.



Integrated frequency converter

- Save equipment: no additional frequency converters are necessary to operate this internal vibrator
- Simply connect to a plug receptacle and get to work right away
- Constant performance and high level of efficiency: reliable operation with generators and even with fluctuating input voltages
- Work safely: no danger from current, thanks to the complete potted electronic components

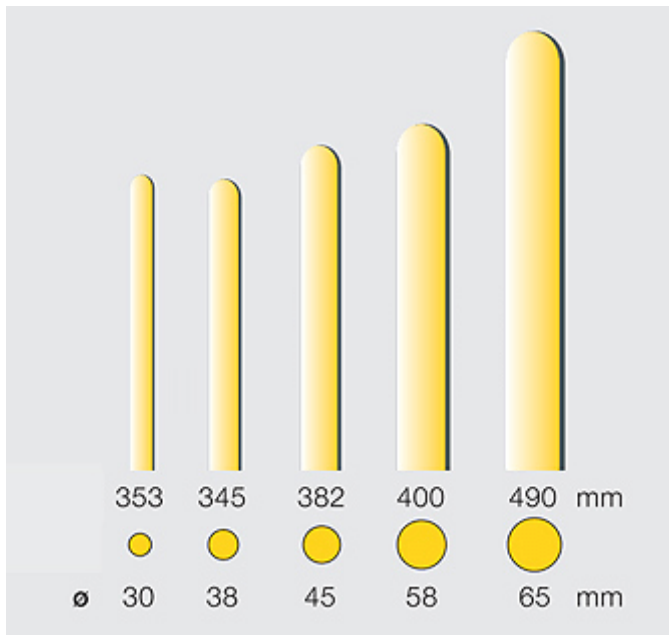

Vibrator head sizes for all applications

- Outfitted for any application – 5 vibrator head sizes available
- Diameter 30, 38, 45, 58, 65 mm



Vibrator head with cylindrical roller bearings

- Extremely durable – completely tempered vibrator head
- Less wear, especially with abrasive concrete aggregates
- Plug effectively dispels shocks on the housing
- Ideal for continuous use under construction site conditions



Protection hose

- Made of sturdy, very abrasion resistant material
- Various protection hose lengths available up to max. 10 meters



**WACKER
NEUSON**
all it takes!



Power cable

- You can't get any more freedom of movement: Power cable with 15 meters in length



IRFU Technical specifications

	IRFU30	IRFU38	IRFU45
Diameter of the vibrator head mm	30	38	45
Length of the vibrator head mm	353	353	382
Weight of the vibrator head kg	1.4	2.2	3.5
Operating weight (Protective hose 5 m) kg	11.5	13.6	16
Operating weight (Protective hose 10 m) kg	14.7	18.7	20
Effective diameter * cm	40	50	60
Vibrations rpm	12,000	12,000	12,000
Engine / Motor	High-frequency squirrel-cage induction motor with integrated electronic frequency converter in the switch box	High-frequency squirrel-cage induction motor with integrated electronic frequency converter in the switch box	High-frequency squirrel-cage induction motor with integrated electronic frequency converter in the switch box
Voltage 1~ V	220–240	220–240	220–240
Current A	2.2	3.5	4.8
Frequency Hz	50–60	50–60	50–60
Protective hose max. ** m	15	15	15
Feed cable m	15	15	15

	IRFU58	IRFU65
Diameter of the vibrator head mm	58	65
Length of the vibrator head mm	400	490
Weight of the vibrator head kg	5.8	9.2
Operating weight (Protective hose 5 m) kg	19.8	25.5
Operating weight (Protective hose 10 m) kg	25.3	33
Effective diameter * cm	85	100
Vibrations rpm	12,000	12,000
Engine / Motor	High-frequency squirrel-cage induction motor with integrated electronic frequency converter in the switch box	High-frequency squirrel-cage induction motor with integrated electronic frequency converter in the switch box
Voltage 1~ V	220–240	220–240
Current A	6	10
Frequency Hz	50–60	50–60
Protective hose max. ** m	15	15



	IRFU58	IRFU65
Feed cable m	15	15

*This is non-binding information, based on the practical experience of our clients under certain operating conditions. Please note that under specific operating conditions these findings may vary. We recommend that you always begin by carrying out a test pour under operating conditions. ** Other hose lengths available.

Please note

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions.

Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2018 Wacker Neuson SE.